


Wastewater Service Cleanout

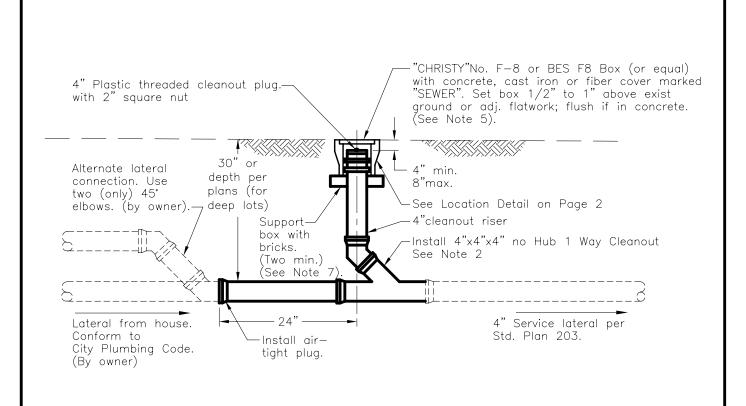

## Notes:

7.

- 1. Install cleanout on all 4" wastewater services unless otherwise specified.
- 2. 45° Wye & 45° elbow combination shall be Polyvinyl Chloride (PVC) per ASTM D-3034 SDR 35 or Acrylonitrile-Butadiene-Styrene (ABS) per ASTM D-2751, Cast Iron Soil Pipe (ASTM A74, service unit) or Ductile Iron (ASTM A746) or VCP Wye tee ASTM C-425. See Material List Page 2.
- 3. Backfill shall conform to Std. Plan 501.
- 4. Maintenance of lateral shall be per City "Wastewater Lateral Maintenance Policy"
- 5. In commercial driveways. Use "Christy" G-5 box W/G-5C lid or BES equal; in residential driveways replace concrete lid with cast iron lid.
- 6. When service is installed with water service, terminate even with the water stub.

Related Plans: 203, 506

Support box not needed if set in concrete.

Sheet 1 of 2

Dr.	ΙZΤ	No.	Date	Revision	Appr.
	N I	1	9/25	MOVED C.O. LOCATION	
Ch.	WS		,		
Date	,				
	2/00				

M:\OPEN\PROJECTS\Seale&Sigs\Wallysign.tif F. Wally Sandelin City Engineer R.C.E. 39895

Approved By:

9/25/02 Date STD PLAN